


RELIEF 4 legs

5036-4LGP

Design Favaretto&Partners

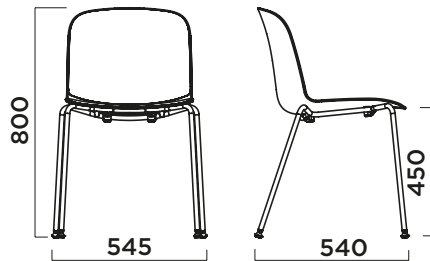

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



30



31



79



6013F



01

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



S020



R8022



S007



S503



S514



S529



R6013

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97,5	0,37	4	26,24	

RELIEF 4 legs upholstered seat panel

5036-4LGS

Design Favaretto&Partners

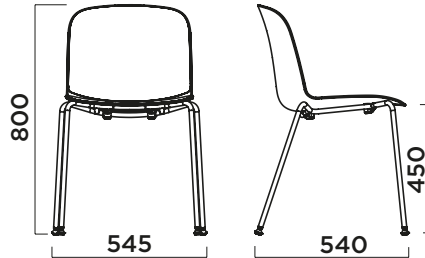

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



30



31



79



6013F



01

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



S020



R8022



S007



S503



S514



S529



R6013



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ . Chromed frame with average thickness of 5 μ .

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ . Telaio cromato con spessore medio 5 μ .

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	14,62

RELIEF 4 legs fully upholstered

5036-4LGT

Design Favaretto&Partners

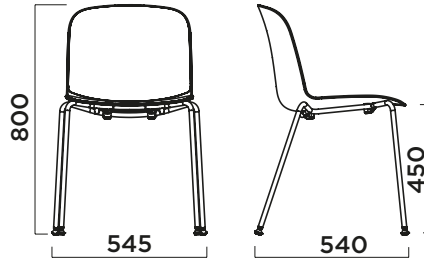

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



30



31



79



6013F



01



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0,28	2	14,62

RELIEF 4 legs with arms

5036-4LCP

Design Favaretto&Partners

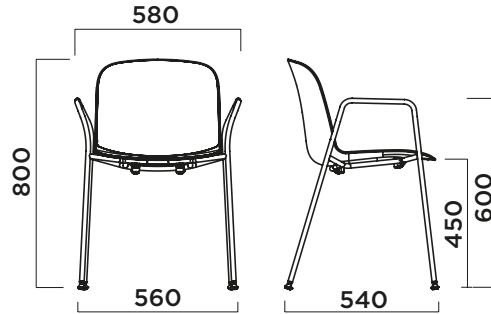

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



30



31



79



6013F



01

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



S020



R8022



S007



S503



S514



S529



R6013

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97,5	0,37	4	29,88	

RELIEF 4 legs with arms upholstered seat panel

5036-4LCS

Design Favaretto&Partners

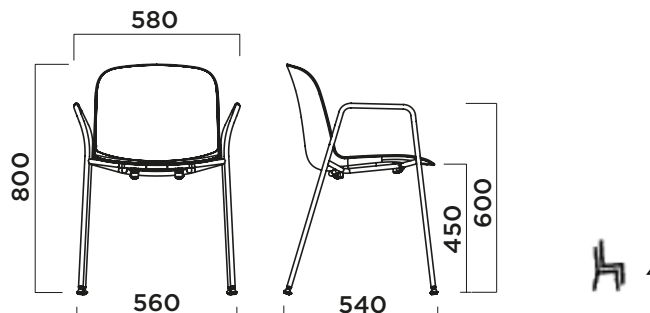

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0.65

0.50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	16,44

RELIEF 4 legs with arms fully upholstered

5036-4LCT

Design Favaretto&Partners

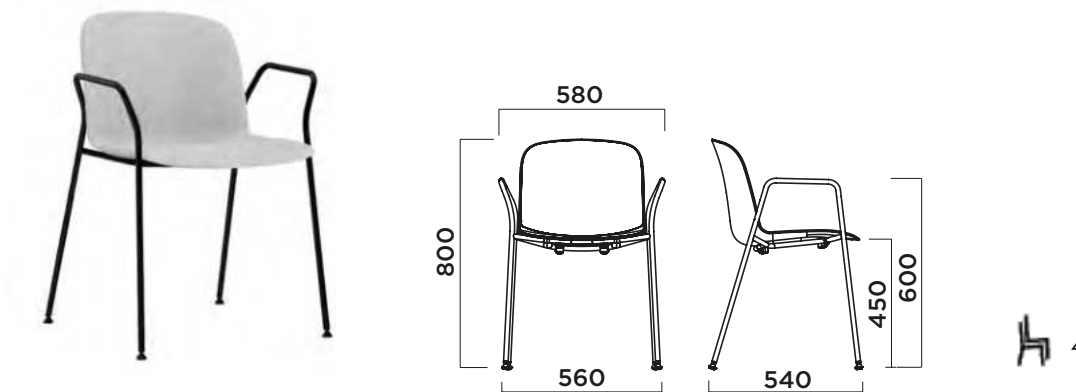


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform





UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect 
- E** Field, Oceanic  Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) **COM Leather(m2)**

1.00 1.40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ . Chromed frame with average thickness of 5 μ .

Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ . Telaio cromato con spessore medio 5 μ .

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	16,44

RELIEF 4 legs with open arms

5036-4LAP

Design Favaretto&Partners

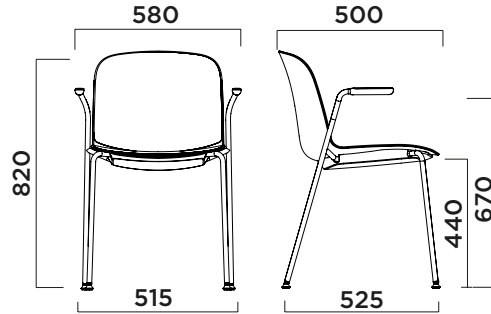


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97,5	0,37	4	26,24	

RELIEF 4 legs open arms upholstered seat panel

5036-4LAS

Design Favaretto&Partners

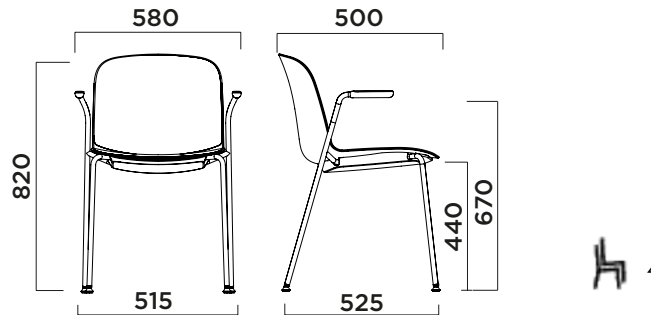


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0.65

0.50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ . Chromed frame with average thickness of 5 μ .

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ . Telaio cromato con spessore medio 5 μ .

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	14,62

RELIEF 4 legs open arms fully upholstered

5036-4LAT

Design Favaretto&Partners

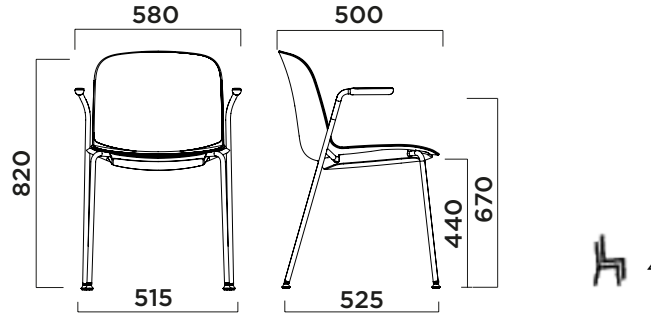


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) **COM Leather(m2)**

1.00 1.40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG



IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	16,44

RELIEF sled

5036-SLDP

Design Favaretto&Partners



FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



30



31



79



6013F



01

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

OPTIONAL

OPTIONAL
OPTIONAL

Writing tablet in HPL. Tablet support in metal drawn rod.

Writing tablet in HPL. Tablet support in metal drawn rod.

Tableta de escritura

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS



PKG



IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	64	97,5	0.37	4	31,72

RELIEF sled upholstered seat panel

5036-SLDS

Design Favaretto&Partners



FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



30



31



79



6013F



01

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri eposi-poliéster spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo eposi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG



IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	17,36

RELIEF sled fully upholstered

5036-SLDT

Design Favaretto&Partners



FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



30



31



79



6013F



01



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	17,36

RELIEF sled with arms

5036- SAOP

Design Favaretto&Partners

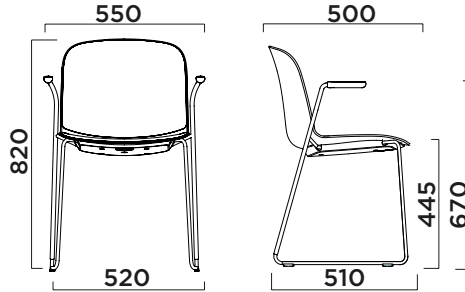


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG



IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85.5	0.32	2	18.5

RELIEF sled with arms upholstered seat panel

5036-SAOS

Design Favaretto&Partners




FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri eposi-poliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97,5	0,37	4	33	

RELIEF sled with arms fully upholstered

5036-SAOT

Design Favaretto&Partners

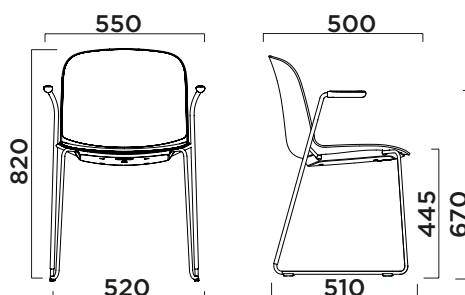


FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00 1,40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	2	18	

RELIEF wooden legs

5036-WLGP

Design Favaretto&Partners

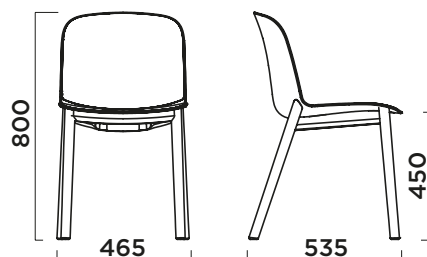

FRAME

TELAIO
BASTIDOR

Solid ash

Frassino massello
Fresno macizo



FRVAN



FRTA04

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS



PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46,5	57	81,5	0.21	1	11,5

RELIEF wooden legs upholstered seat panel

5036-WLGS

Design Favaretto&Partners

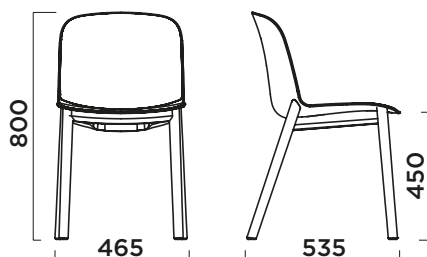

FRAME

TELAIO
BASTIDOR

Solid ash

Frassino massello
Fresno macizo



FRVAN



FRTA04

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel
Upholstered seat panel

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46,5	57	81,5	0,21	1	11,5

RELIEF wooden legs fully upholstered

5036-WLGT

Design Favaretto&Partners

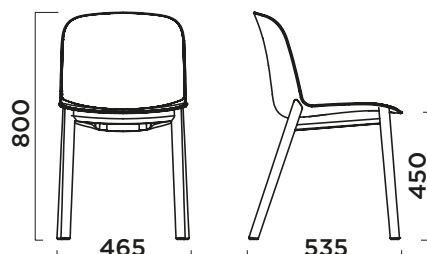

FRAME

TELAIO
BASTIDOR

Solid ash

Frassino massello

Fresno macizo



FRVAN



FRTA04

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect 
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46,5	57	81,5	0,21	1	11,5

RELIEF wooden legs with arms

5036-WLOP

Design Favaretto&Partners

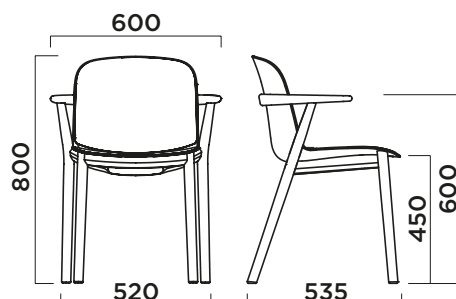

FRAME

TELAIO
BASTIDOR

Solid ash

Frassino massello

Fresno macizo



FRVAN



FRTA04

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS



PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	56	62	84	0.29	1	12.5

RELIEF wooden legs with arms upholstered seat panel

5036-WLOS

Design Favaretto&Partners

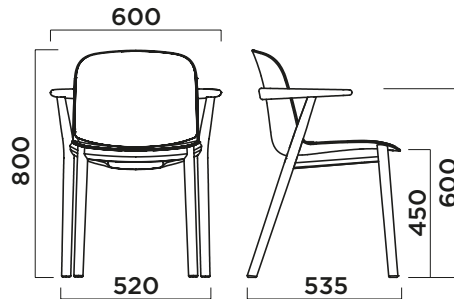

FRAME

TELAIO
BASTIDOR

Solid ash

Frassino massello

Fresno macizo



FRVAN



FRTA04

SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect 
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	56	62	84	0.29	1	12,5

RELIEF wooden legs with arms fully upholstered

5036-WLOT

Design Favaretto&Partners

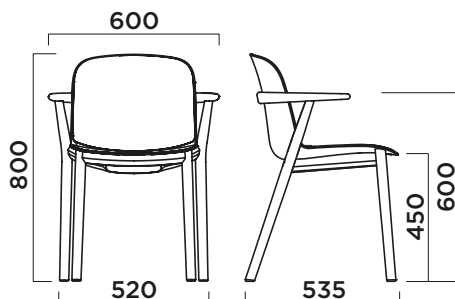

FRAME

TELAIO
BASTIDOR

Solid ash
Frassino massello
Fresno macizo



FRVAN



FRTA04

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect 
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) COM Leather(m2)

1,00 1,40

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	56	62	84	0.29	1	12,5

RELIEF 4 star aluminium base

5036-4STP

Design Favaretto&Partners

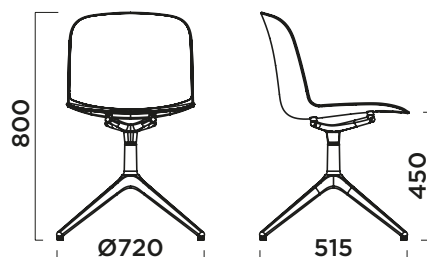

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI

CERTIFICADOS

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0.32	1	12,82

RELIEF 4 star aluminium base upholstered seat panel

5036-4STS

Design Favaretto&Partners

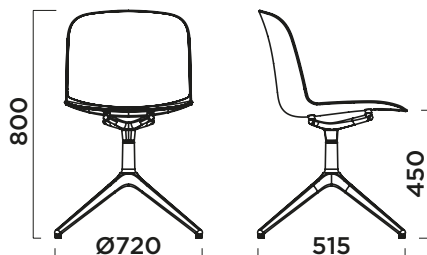

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 μ.

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0,32	1	12,82

RELIEF aluminium base fully upholstered

5036-4STT

Design Favaretto&Partners

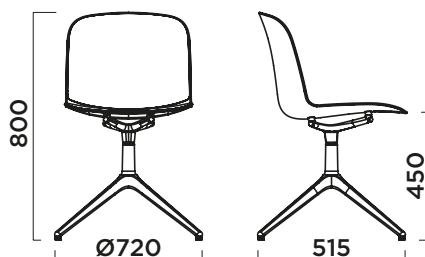

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ .

Base e supporto in alluminio verniciato a polvere epossipoliesteri con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF 4 star aluminium base with arms

5036-4SAP

Design Favaretto&Partners

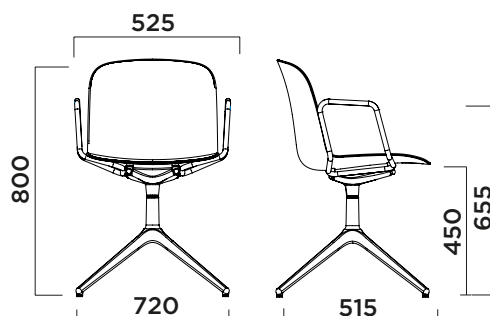

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ .

Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0.32	1	12,82

RELIEF 4 star aluminium base with arms fully upholstered

5036-4SAT

Design Favaretto&Partners

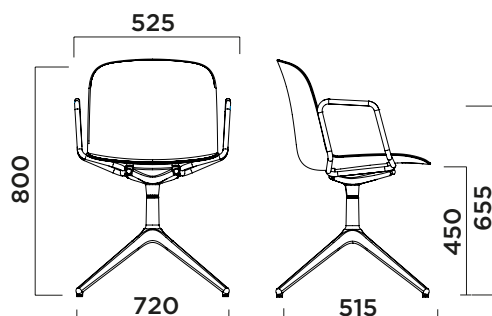

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ .

Base e supporto in alluminio verniciato a polvere epossipoliesteri con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF 4 star aluminium base with arms upholstered seat panel

5036-4SAS

Design Favaretto&Partners

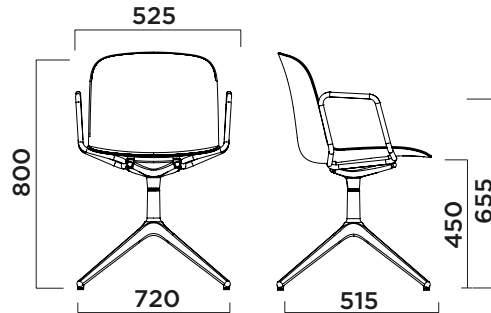

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

UPHOLSTERY



TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 μ.

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO

EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0,32	1	12,82

RELIEF swivel with castors

5036-4SCP

Design Favaretto&Partners



BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT



00L

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



30



31

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

SHELL

SCOCCA
CARCASA

SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 µ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS



PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF swivel with castors upholstered seat panel

5036-4SCS

Design Favaretto&Partners



BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529





R6013

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

SUPPORT

SUPPORTO

SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

CASTORS

RUOTE

RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto in alluminio verniciato a polvere epossipoliester con spessore medio di 50 µ.

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0,32	1	12,82

RELIEF swivel with castors fully upholstered

5036-4SCT

Design Favaretto&Partners

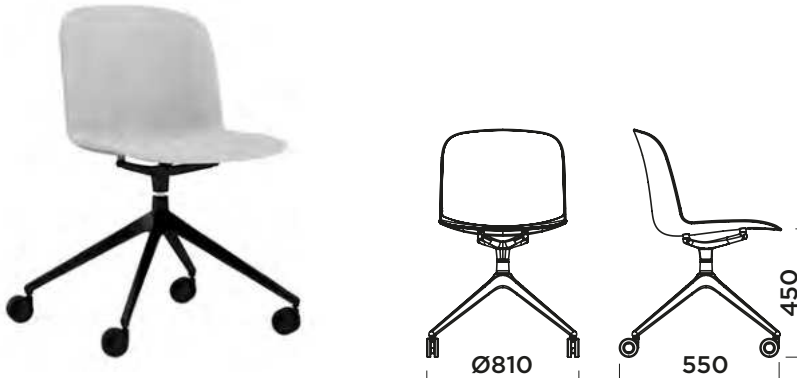

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

UPHOLSTERY



TAPPEZZERIA

TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

SUPPORT

SUPPORTO

SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

CASTORS

RUOTE

RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF swivel with castors with arms

5036-4CAP

Design Favaretto&Partners

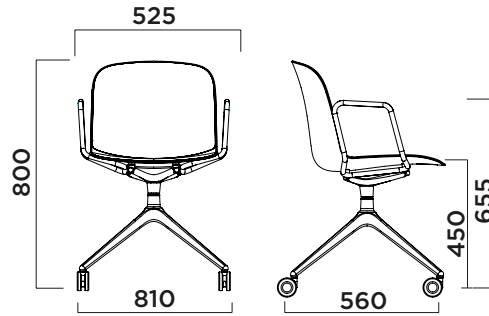

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

SUPPORT

SUPPORTO

SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

CASTORS

RUOTE

RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ .

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12.82	

RELIEF swivel with castors with arms upholstered seat panel

5036-4CAS

Design Favaretto&Partners

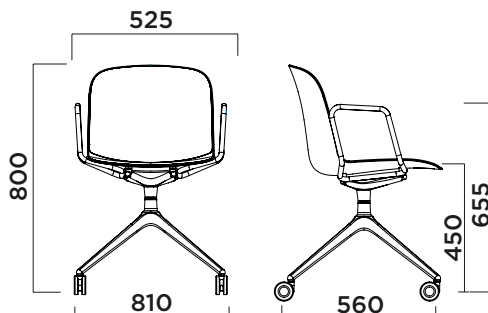

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0,32	1	12,82

RELIEF swivel with castors with arms fully upholstered

5036-4CAT

Design Favaretto&Partners

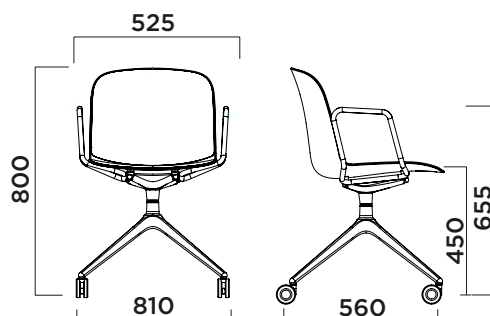

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L

30

31

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1.00

1.40

SUPPORT

SUPPORTO

SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

CASTORS

RUOTE

RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF 4 star updown

5036-4SUP


Design Favaretto&Partners

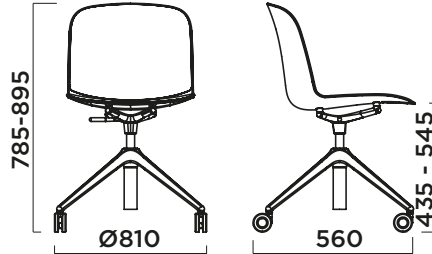

BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

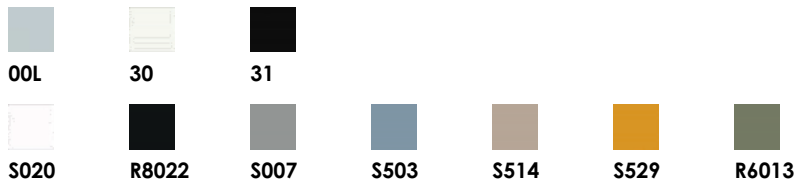

SHELL

SCocca
CARCASA

SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS
PISTÓN DE GAS

Gas column Ø 50.
Cononna a gas Ø
Pistón de gas Ø 50.

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS



PKG

IMBALLO
EMBALAJE


Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0.32	1	12,82

Reproduction of this document is strictly prohibited without prior written authorisation from Omp srl. Sizes, weights and finishes may change without previous notice.
 È vietata la riproduzione del seguente documento senza previa autorizzazione scritta da parte di Omp srl. Dimensioni, pesi e finiture possono variare senza alcun preavviso.
 La reproducción de este documento está estrictamente prohibida sin la autorización previa de Omp srl. Los tamaños, pesos y acabados pueden cambiar sin previo aviso.

RELIEF 4 star updown upholstered seat panel

5036-4SUS

Design Favaretto&Partners

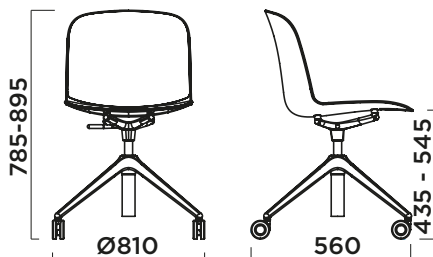

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.

Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.



SHELL

SCocca

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65 0,50

SUPPORT

SUPPORTO

SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS

PISTÓN DE GAS

Gas column Ø 50.

Cononna a gas Ø

Pistón de gas Ø 50.

CASTORS

RUOTE

RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF 4 star updown fully upholstered

5036-4SUT

Design Favaretto&Partners

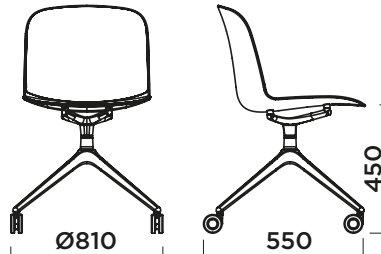

BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.



00L



30



31


UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00

1,40

SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium

Alluminio presso fuso pulito.

Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS
PISTÓN DE GAS

Gas column Ø 50.

Cononna a gas Ø

Pistón de gas Ø 50.

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.

Ruote forate diametro 60 perno 11.

Ruedas pivotantes perforadas diám. 60 perno 11.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0.32	1	12,82

RELIEF 4 star updown with arms

5036-4UAP

Design Favaretto&Partners

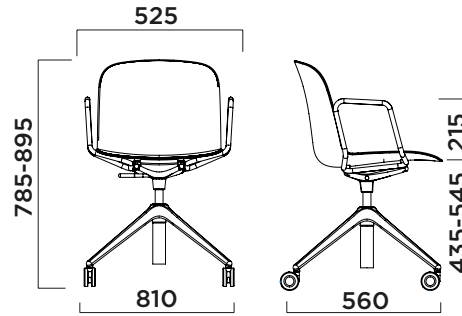

BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ .
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 μ .
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.



00L



30



31



S020



R8022



S007



S503



S514



S529



R6013

SHELL

SCocca
CARCASA

SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS
PISTÓN DE GAS

Gas column \varnothing 50.
Cononna a gas \varnothing
Pistón de gas \varnothing 50.

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF 4 star updown with arms upholstered seat panel

5036-4UAS

Design Favaretto&Partners

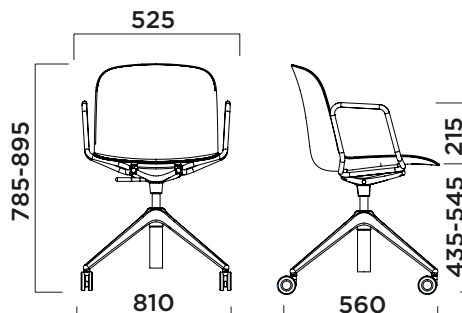

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 μ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85,5	0,32	1	12,82

RELIEF 4 star updown with arms fully upholstered

5036-4UAT

Design Favaretto&Partners

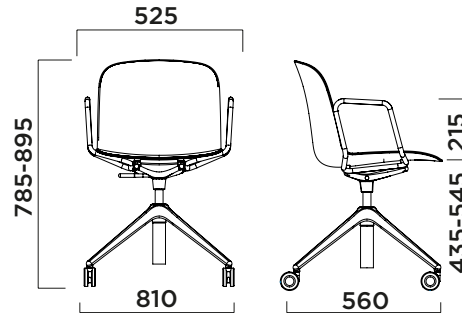

BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1,00	1,40

SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS
PISTÓN DE GAS

Gas column Ø 50.
Cononna a gas Ø
Pistón de gas Ø 50.

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0,32	1	12,82	

RELIEF 4 legs kitchen stool

5036-4KSP

Design Favaretto&Partners

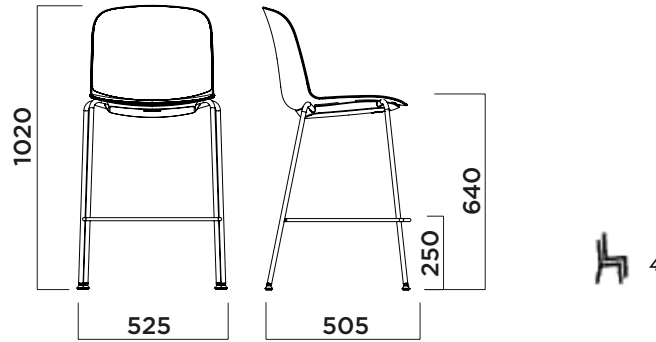


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0,4	1	9,5	

RELIEF 4 legs kitchen stool upholstered seat panel

5036-4KSS

Design Favaretto&Partners

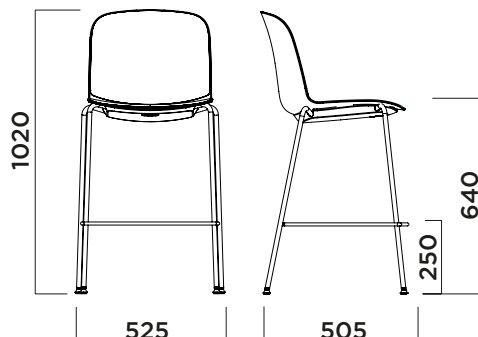

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0,4	1	9,5	

RELIEF 4 legs kitchen stool fully upholstered

5036-4KST

Design Favaretto&Partners

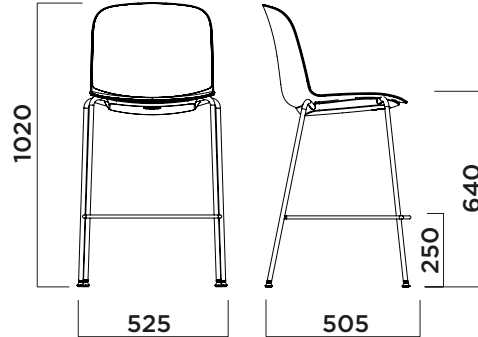


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1,00 1,40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.


Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	108,5	0.4	1	9,5


RELIEF 4 legs bar stool
5036-4BSP
Design Favaretto&Partners

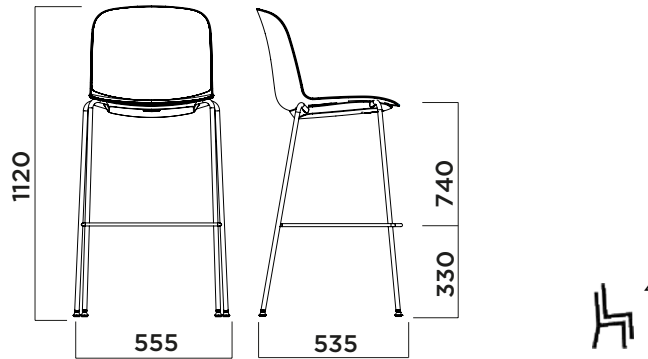

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SHELL
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	118,5	0,44	1	10,5	

RELIEF sled bar stool

5036-SBSP

Design Favaretto&Partners

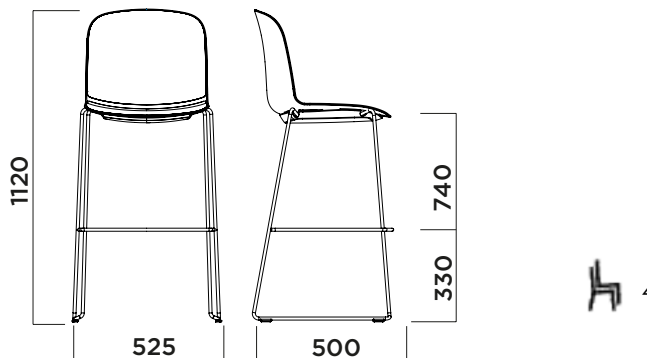

FRAME

TELAIO
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	118,5	0,44	2	17,36

RELIEF sled bar stool upholstered seat panel

5036-SBSS

Design Favaretto&Partners

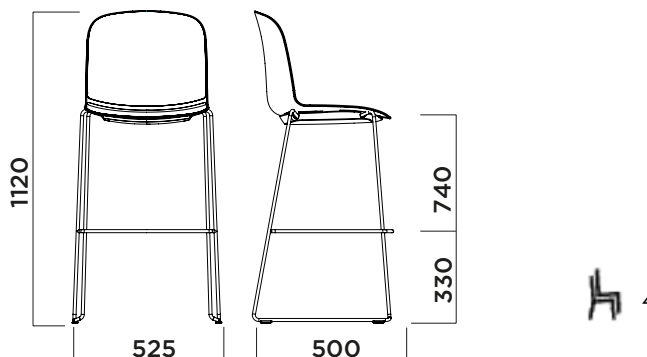

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	118,5	0,44	2	17,36	

RELIEF sled bar stool fully upholstered

5036-SBST

Design Favaretto&Partners

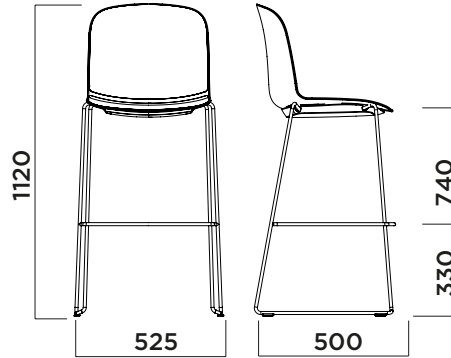


FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.

Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell

Full upholstered shell

Full upholstered shell

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

COM Fabric(m) **COM Leather(m2)**

1,00 1,40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	118,5	0,44	2	17,36	