


**SICLA 4 legs**

5040-4LGP

Design Claus Breinholt

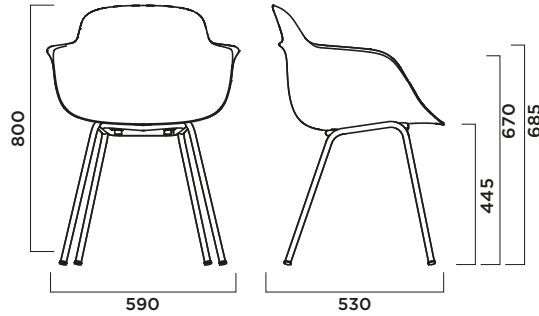

**FRAME**

TELAIO  
BASTIDOR

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.  
Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.  
Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



**SHELL**

SCOCCA  
CARCASA

Polypropylene + Glass fiber  
Polypropylene + Glass fiber  
Polipropilene + Glass fiber



**FINISHING**

FINITURA  
ACABADO

Chrome plating with medium thickness 5  $\mu$ . Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$ .  
Telaio cromato con spessore medio 5  $\mu$ . Telaio verniciato con polveri epossi-poliestere spessore medio 50  $\mu$ .  
Cromado con 5  $\mu$  de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50  $\mu$  de espesor medio.

**FEET**

PIEDINI  
PIES DE APOYO

Polypropylene  
Polipropilene  
Polipropileno

**PKG**


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	11.3	

## SICLA 4 legs upholstered seat panel

5040-4LGS

Design Claus Breinholt

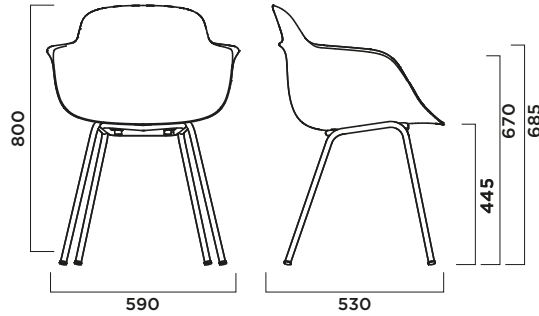

### FRAME

TELAIO  
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

0,65

0,50

### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossi-poliestere spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	11.3	

## SICLA 4 legs full upholstered panel

5040-4LGT

Design Claus Breinholt

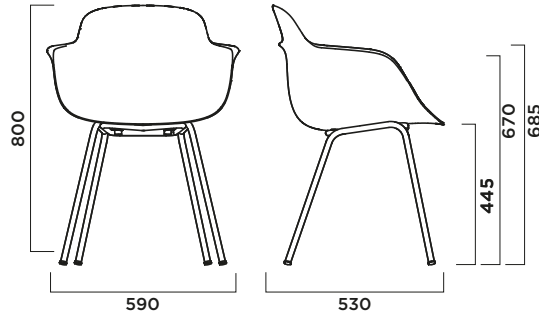

### FRAME

TELAIO  
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber





### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

1.00

1.20

### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5  $\mu$ . Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$ .

Telaio cromato con spessore medio 5  $\mu$ . Telaio verniciato con polveri epossi-poliestere spessore medio 50  $\mu$ .

Cromado con 5  $\mu$  de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50  $\mu$  de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	11.3	

## SICLA sled

5040-SLDP

Design Claus Breinholt

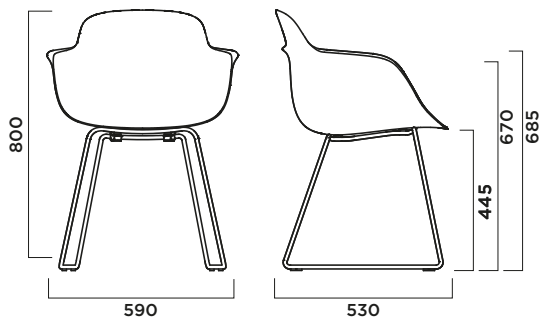

### FRAME

TELAIO  
BASTIDOR

Metal frame in drawn rod diameter 11 mm – Fe360.

Telaio in tondino Diametro 11 mm - Fe360.

Bastidor metálico de varilla de 11 mm de diámetro - Fe360



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5  $\mu$ . Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$ .

Telaio cromato con spessore medio 5  $\mu$ . Telaio verniciato con polveri epossi-poliestere spessore medio 50  $\mu$ .

Cromado con 5  $\mu$  de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50  $\mu$  de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.3	

## SICLA sled upholstered seat panel

5040-SLDS

Design Claus Breinholt

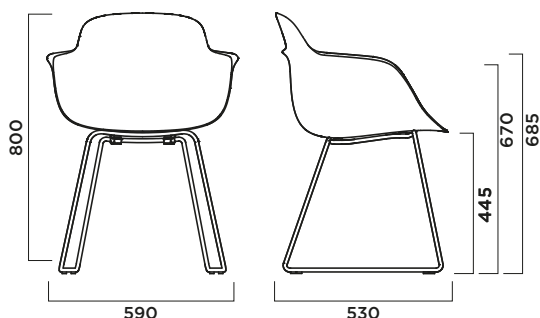

### FRAME

TELAIO  
BASTIDOR

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.  
Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.  
Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber




### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0,50

### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.

Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossipoliesteri spessore medio 50 μ.

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.3	

## SICLA sled full upholstered panel

5040-SLDT

Design Claus Breinholt

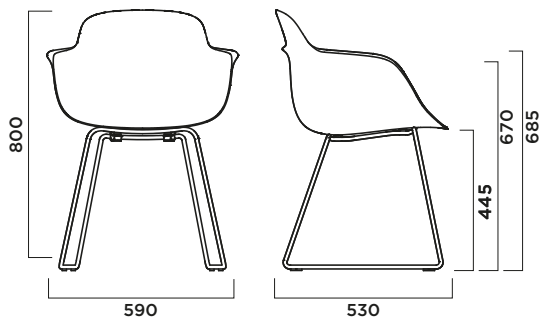

### FRAME

TELAIO  
BASTIDOR

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.  
Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.  
Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber  
Polypropylene + Glass fiber  
Polypropylene + Glass fiber



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Polypropylene full upholstered shell.  
Polypropylene full upholstered shell.  
Polypropylene full upholstered shell.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1.00	1.20

### FINISHING

FINITURA  
ACABADO

Chrome plating with medium thickness 5 μ. Painted frame with epoxy-polyester powder with average thickness of 50 μ.  
Telaio cromato con spessore medio 5 μ. Telaio verniciato con polveri epossipoliesteri spessore medio 50 μ.  
Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene  
Polipropilene  
Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.3	

## SICLA wooden legs

5040-WLGP

Design Claus Breinholt

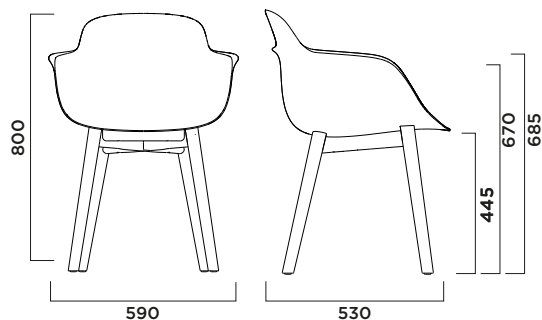

### WOODEN LEGS

GAMBE LEGNO

WOODEN LEGS

Solid natural ash

Frassino naturale massello

Fresno natural macizo



**FRVAN**



**FRTA04**

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber.

Polypropylene + Glass fiber.

Polypropylene + Glass fiber.



**S020**



**R8022**



**S514**



**R6013**



**P7608U**



**S011**



**S503**

### FEET

PIEDINI

PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85.5	0.32	1	10.2

## SICLA wooden legs upholstered seat panel

5040-WLGS

Design Claus Breinholt

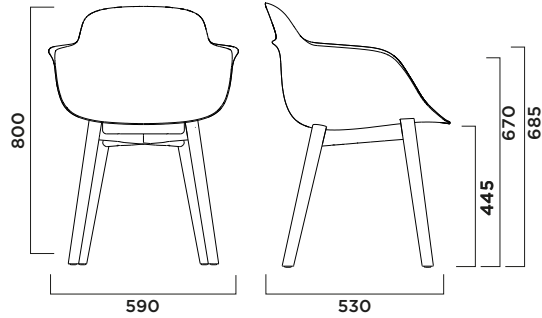

### WOODEN LEGS

GAMBE LEGNO

WOODEN LEGS

Solid natural ash  
Frassino naturale massello  
Fresno natural macizo



**FRVAN**



**FRTA04**

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber.

Polypropylene + Glass fiber.

Polypropylene + Glass fiber.



**S020**



**R8022**



**S514**



**R6013**



**P7608U**



**S011**



**S503**

### UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect
- E** Field, Oceanic , Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

**COM Fabric(m)**    **COM Leather(m2)**

0,65

0,50

### FEET

PIEDINI

PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85.5	0.32	1	10.2

## SICLA wooden legs full upholstered panel

5040-WLGT

Design Claus Breinholt

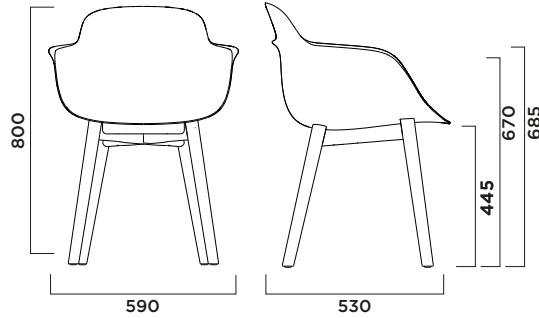

### WOODEN LEGS

GAMBE LEGNO

WOODEN LEGS

Solid natural ash

Frassino naturale massello

Fresno natural macizo



**FRVAN**



**FRTA04**



**S020**



**R8022**



**S514**



**R6013**



**P7608U**



**S011**



**S503**

### SHELL

SCOCCA

CARCASA

### UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

- A** Space, Panarea
- B** Eco Leather
- C** Convert D, Velvety, Step, Step Melange, Nuvole
- D** Reflect ♻️
- E** Field, Oceanic ♻️, Yoredale
- F** Steelcut Quartet, Canvas2
- G** Divina3, Divina Melange, Fiord
- H** Full Leather

**COM Fabric(m)**   **COM Leather(m2)**

**1.00**

**1.20**

### FEET

PIEDINI

PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	10.2	

## SICLA 4 star aluminium base

5040-4STP

Design Claus Breinholt

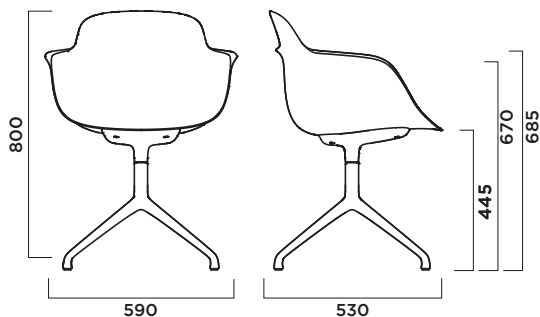

### BASE

BASE  
BASE

Polished aluminium 4 star base. Support polished die casting aluminium

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### FINISHING

FINITURA  
ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### FEET

PIEDINI  
PIES DE APOYO

Polypropylene.

Polipropilene

Polipropileno

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85.5	0.32	1	12.2

## SICLA aluminium base upholstered seat panel

5040-4STS

Design Claus Breinholt

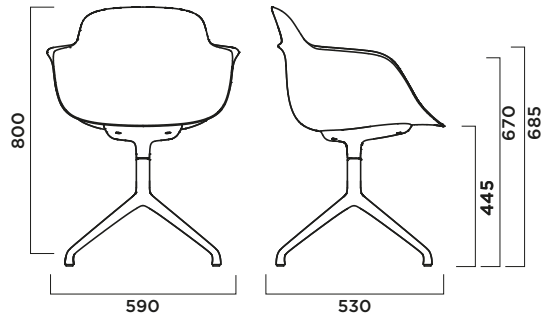

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

0,65

0,50

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### FEET

PIEDINI

PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA aluminium base full upholstered panel

5040-4STT

Design Claus Breinholt

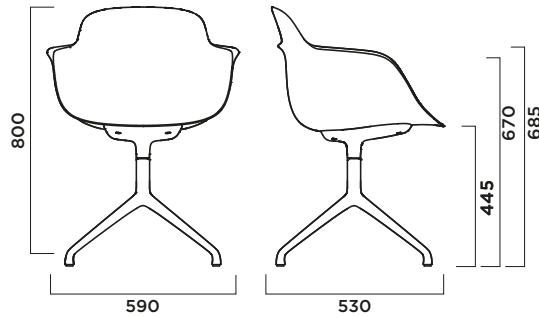

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



00L



30



31



514F



503F



6013F



3009F

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



S020



R8022



S514



R6013



P7608U



S011



S503

### UPHOLSTERY



TAPPEZZERIA

TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1.00

1.20

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### FEET

PIEDINI

PIES DE APOYO

Polypropylene.

Polipropilene

Polipropileno

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA swivel with castors

5040-4SCP

Design Claus Breinholt

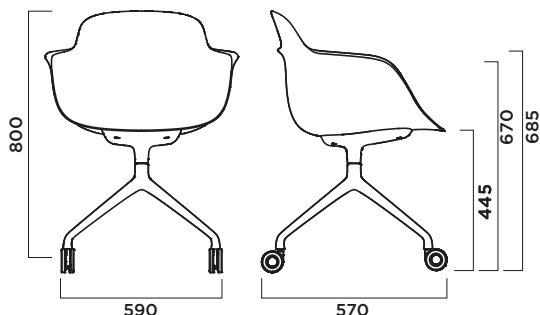

### BASE

BASE  
BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### FINISHING

FINITURA  
ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### CASTORS

RUOTE  
RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	59	63	85.5	0.32	1	12.2

## SICLA swivel with castors upholstered seat panel

5040-4SCS

Design Claus Breinholt

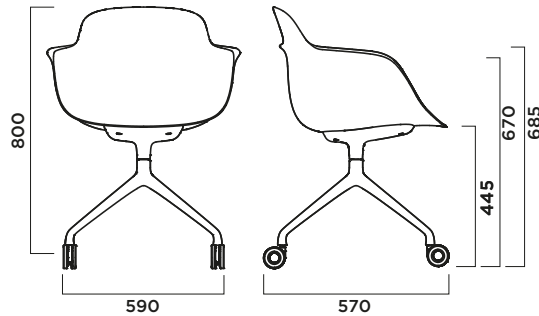

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



00L



30



31



514F



503F



6013F



3009F

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



S020



R8022



S514



R6013



P7608U



S011



S503

### UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

0,65

0,50

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossipoliesteri con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### CASTORS

RUOTE

RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA swivel with castors full upholstered panel

5040-4SCT

Design Claus Breinholt

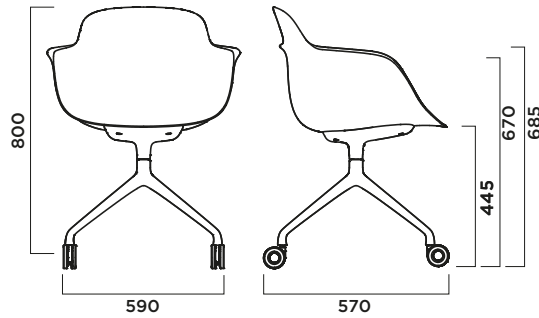

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



00L



30



31



514F



503F



6013F



3009F

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



S020



R8022



S514



R6013



P7608U



S011



S503

### UPHOLSTERY



TAPPEZZERIA

TAPIZADOS

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1.00

1.20

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 μ.

Base e supporto verniciati a polvere epossipoliesteri con spessore medio di 50 μ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

### CASTORS

RUOTE

RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA 5 star updown

5040-5SUP

Design Claus Breinholt

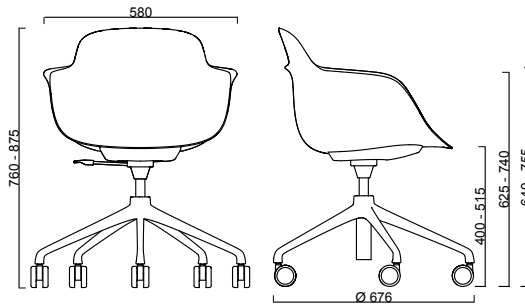

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



**00L**



**30**



**31**



**514F**



**503F**



**6013F**



**3009F**

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



**S020**



**R8022**



**S514**



**R6013**



**P7608U**



**S011**



**S503**

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### CASTORS

RUOTE

RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	70,5	73,5	88	0.45	1	12

## SICLA 5 star updown upholstered seat panel

5040-5SUS

Design Claus Breinholt

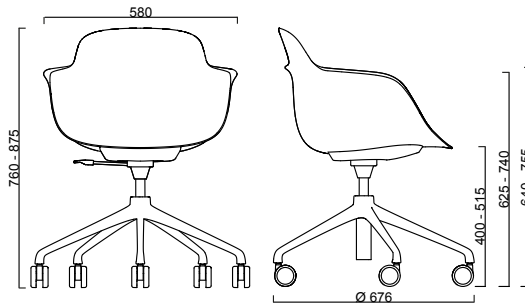

### BASE

BASE

BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



00L



30



31



514F



503F



6013F



3009F

### SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



S020



R8022



S514



R6013



P7608U



S011



S503

### UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

0,65

0,50

### FINISHING

FINITURA

ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossi-poliestere con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### CASTORS

RUOTE

RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG

IMBALLO


EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA 5 star updown full upholstered panel

5040-5SUT

Design Claus Breinholt

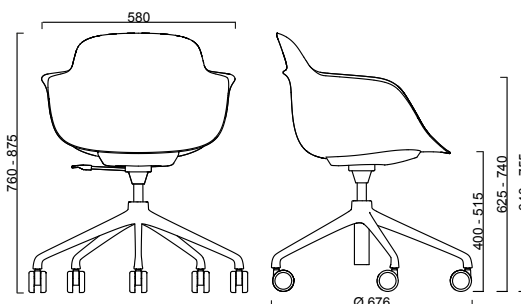

### BASE

BASE  
BASE

Polished aluminium 4 star base. Support polished die casting aluminium.

Base 4 razze in alluminio lucido. Supporto in alluminio pressofuso lucido.

Base de aluminio pulido de 4 radios Soporte de aluminio fundido a presión pulido



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)    COM Leather(m2)

1.00

1.20

### FINISHING

FINITURA  
ACABADO

Base and support painted with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto verniciati a polvere epossipoliesteri con spessore medio di 50 µ.

Base y soporte con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

### CASTORS

RUOTE  
RUEDAS PIVOTANTES

Castors diam. 60 stem 11.

Ruote diam. 60 stem 11.

Ruedas pivotantes diám. 60 perno 11.

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.2	

## SICLA rocking

5040-ROCP

Design Claus Breinholt

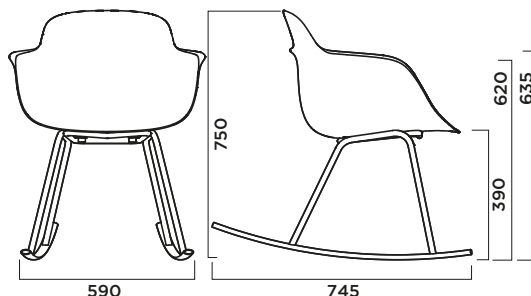

### ROCKING FRAME

TELAIO DONDOLO  
ROCKING FRAME

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Metal guide in oval tube 30x15 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.

Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Guida metallica con tubo ovale 30x15 mm, spessore 2mm, in conformità con la norma UNI EN 10305-3.

Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Patas de tubo ovalado 30x15 mm, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	69	87	74.5	0.45	1	12.5

## SICLA rocking upholstered seat panel

5040-ROCS

Design Claus Breinholt

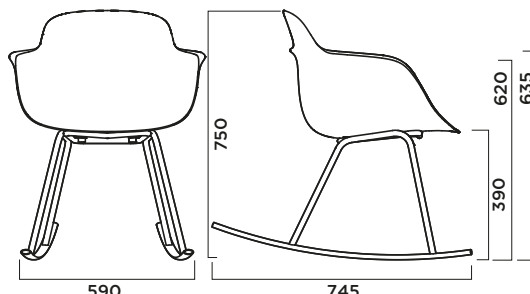

### ROCKING FRAME

TELAIO DONDOLO  
ROCKING FRAME

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Metal guide in oval tube 30x15 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.

Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Guida metallica con tubo ovale 30x15 mm, spessore 2mm, in conformità con la norma UNI EN 10305-3.

Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Patas de tubo ovalado 30x15 mm, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

0,65 0,50

### FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.

Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

### PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	69	87	74.5	0.45	1	12.5

## SICLA rocking full upholstered panel

5040-ROCT

Design Claus Breinholt

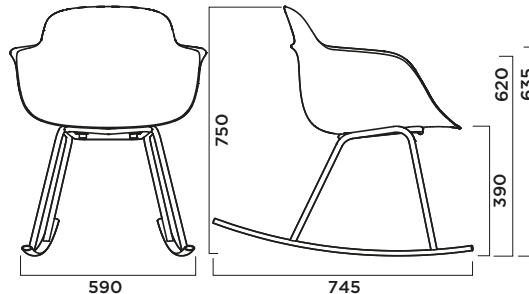

### ROCKING FRAME

TELAIO DONDOLO  
ROCKING FRAME

Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Metal guide in oval tube 30x15 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.

Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. Guida metallica con tubo ovale 30x15 mm, spessore 2mm, in conformità con la norma UNI EN 10305-3.

Laterales de tubo redondo de 18 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Soporte de asiento de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Patas de tubo ovalado 30x15 mm, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



01



31

### SHELL

SCOCCA  
CARCASA

Polypropylene + Glass fiber

Polypropylene + Glass fiber

Polypropylene + Glass fiber



S020



R8022



S514



R6013



P7608U



S011



S503



### UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

Polypropylene full upholstered shell.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect 
- E Field, Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

1.00

1.20

### FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$ . Chromed frame with average thickness of 5  $\mu$ .

Telaio verniciato con polveri epossipoliesteri spessore medio di 50  $\mu$ . Telaio cromato con spessore medio 5  $\mu$ .

Bastidor con recubrimiento en polvo eposi-poliéster con 50  $\mu$  de espesor medio. Bastidor cromado con 5  $\mu$  de espesor medio.

### PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	69	87	74.5	0.45	1	12.5